Network Keyboard

BDTSecureKB-1100



Key Features

LCD screen display

Four-dimensional joystick control

Based on IP network

Support multiple user permissions

 $Connectable \,to\,NVR\,to\,control\,NVR\,menu\,and\,PTZ\,operations$

Multiple devices can be connected


Specifications

Product model	BDTSecureKB-1100
Joystick	four-dimensional joystick
Ethernet port	1 RJ-45 10 M / 100 M adaptive Ethernet port
USB Interface	1 USB2.0 interfaces
Serial Interface	1 RS-232, 2 RS-485
Power Supply	12V DC
Consumption	5W
Working Temperature	-10°C ~ + 55°C
Working Humidity	10% ~ 90%
Dimensions	47mm×270mm×440mm(1.9"×10.6"×17.3")
Weight	<1kg

Interface figure



Dimensions

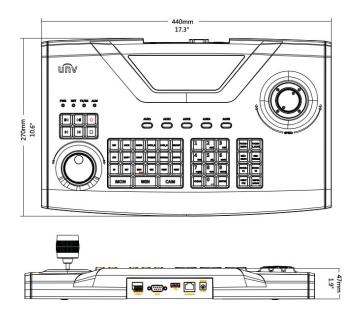



"Your Reliable Integrated Video Surveillance Solutions Provider"

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131 Email: info@qixingtechnology.com; qixing@qixingtechnology.com https://www.qixingtechnology.com ©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.