

Network Video Recorder

BDTSecureNVR30209S




Key Features

- Support Ultra 265/H.265/H.264 video formats
 - 9-channel input
 - Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
 - HDMI and VGA simultaneous output
 - Up to 8 Megapixels resolution recording
 - Accurate retrieval, instant playback
 - 2 SATA HDDs, up to 10TB for each HDD
 - ANR technology to enhance the storage reliability when the network is disconnected
 - Support cloud upgrade
-


Specifications

BDTSecureNVR30209S	
Video/Audio Input	
IP Video Input	9-ch
Two-way Audio Input	1-ch, RCA
Network	
Incoming bandwidth	90Mbps
Outgoing bandwidth	72Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA Output	HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Audio Output	1-ch, RCA
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	9-ch
Corridor Mode Screen	3/4/5/7/9
Decoding	
Decoding format	Ultra 265, H.265, H.264
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 1 x 6MP@30, 1 x 5MP@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30
Hard Disk	
SATA	2 SATA interface
Capacity	up to 10TB for each disk
External Interface	
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1x USB2.0, Front panel: 1 x USB2.0
General	
Power Supply	12V DC Power Consumption: ≤7 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	380mm × 315mm × 49mm (15.0"× 12.4" ×1.9")
Weight (without HDD)	≤ 1.6 Kg (3.53 lb)

Dimensions

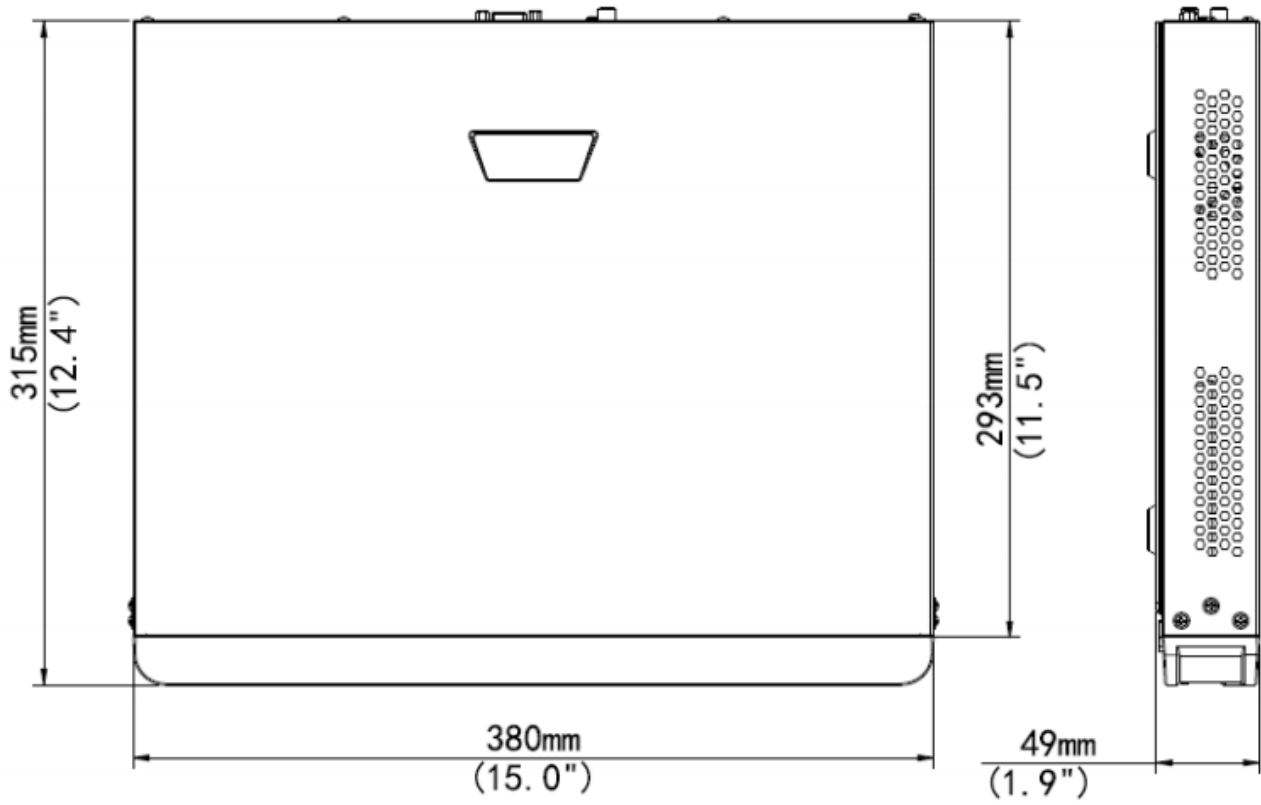

Rear Panel

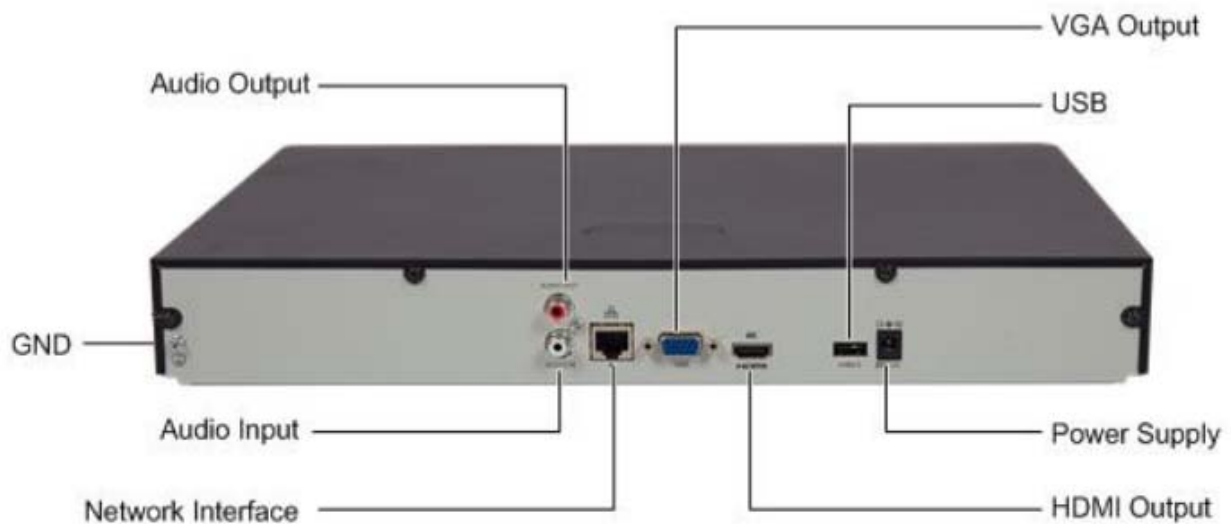

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.