

22" LED FHD Monitor

BDTSecureMW3222V



Key Features


- True color display
- Resolution is up to at 1920×1080
- Wide view of field:170°(H)/ 160°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language

Specifications


Model	BDTSecureMW3222V
Display	
Display Type:	LED Backlight
Screen Size	21.5"
Pixel Pitch(mm)	0.2482x 0.2482
Max Resolution	1920x1080
Brightness	250 cd/m ²
Contrast	1000:1
Response Time	5ms
color	16.7M
Viewing Angle	Horizontal 170°, Vertical 160°
Interface	
VGA	1
HDMI	1
Audio In	1
Audio	
Audio Input	1, 3.5 mm mini-jack
Speaker	2x2W
OSD	
Multi- Language	11 (English, French, German, Italian, Simplified Chinese, Traditional Chinese, Korean, Japanese, Espanola, Portuguese, Russian)
Mounting	
VESA	100mm x 100mm
General	
Power supply	DC 12V, 2A
Consumption	<20 W(on) <0.5 W(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-20°C ~ 60°C
Storage Humidity	0%~90% (No Condensation)
Dimension (WxHxD)	509.5mm x 304.5 mm x 35.1mm(No Pedestal)
Weight:	Net Weight:2.51Kg Gross Weight:3.8Kg
Accessory	
Standard	HDMI cable, Adapter& power cable, Pedestal,Quick Guide
Optional	Hanging bracket,

Appearance

Dimensions

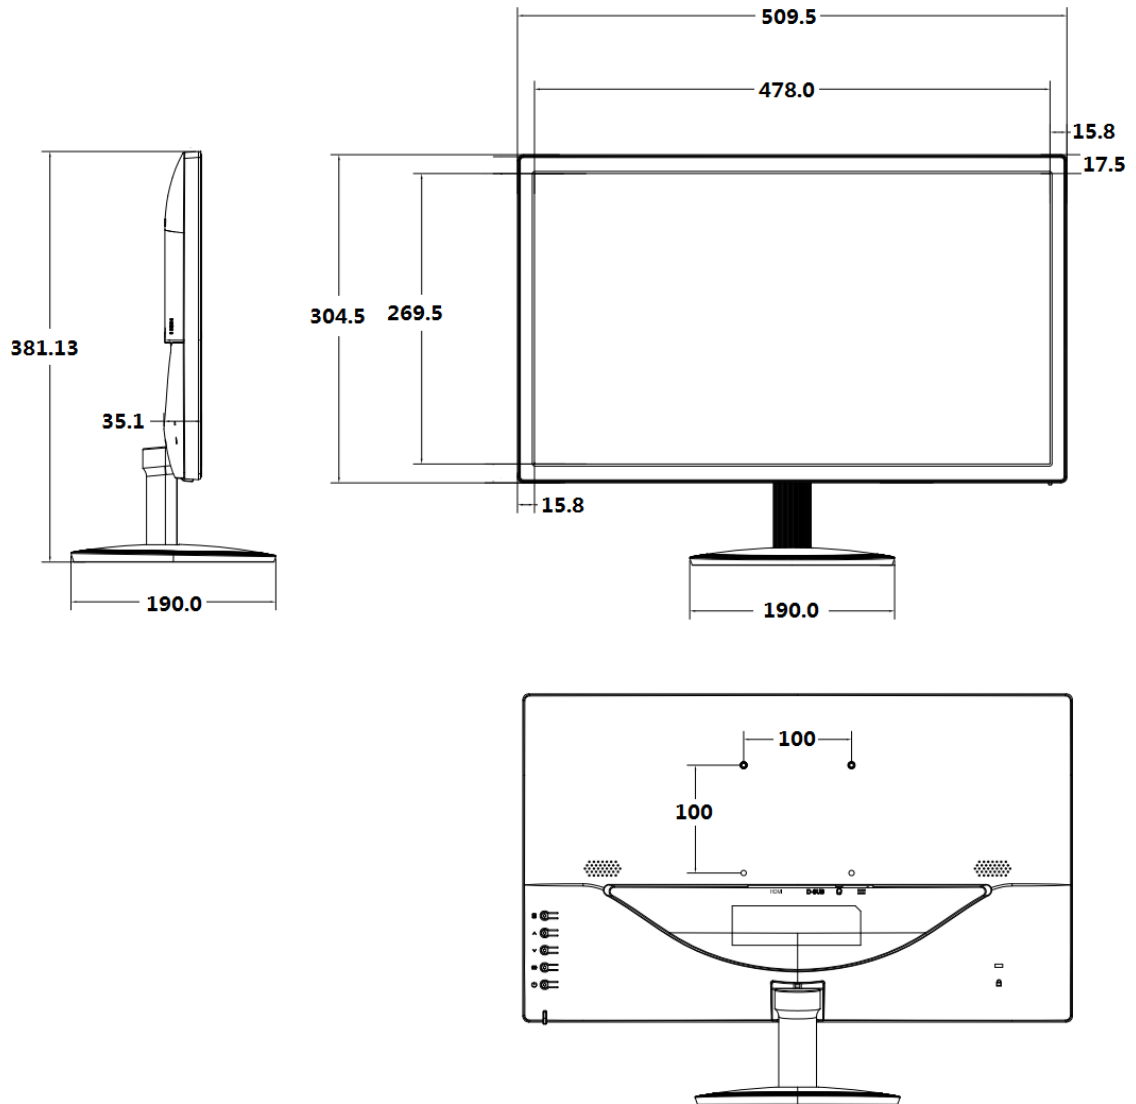

Interfaces

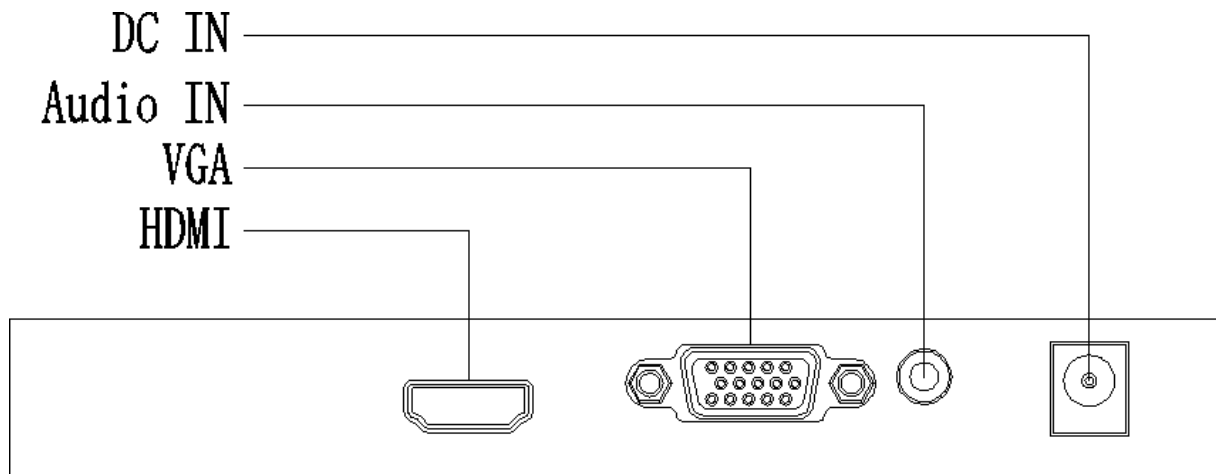

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.