BDTSecureDEU1008 Disk Enclosure

Overview

BDTSecureDEU1008, with high performance, high reliability, high density, high scalability, is anaffordable high-leveldisk enclosure developed especially for video surveillance.



Features

High density

The innovative enclosure with 530.4mm depth and 2U height that holds up to 8 disks, is space-saving and applicable to the standard rack-mounted scenarios.

Power protection

Disk poweredonsequentially during system startup, protection from impulse current.


Multistagefan speed and energy saving

Fans with multistage speed are configured in the hot-swappable frame in redundancy mode. System power consumption can be balanced intelligently with heat dissipation calculation to ensure low power consumption and stable operation of the system.

Specifications

	BDTSecureDEU1008	
Storage		
HDD	8 SATA Interfaces	
Disk Capacity	up to 8TB for each disk	
External Interface		
Back-end Expansion Interface	1 Mini SAS	
General		
Power Supply	100 ~ 240V	
Consumption (with HDD)	≤ 100W	
Working Environment	-10 °C~ 55 °C 5%~95% RH (non-condensing)	
Weight(Without HDD)	< 8 kg(17.6lb)	
Dimensions (W×D×H)	442.0 × 530.4 × 86.1mm (17.4" × 20.88" × 3.39")	

Dimensions

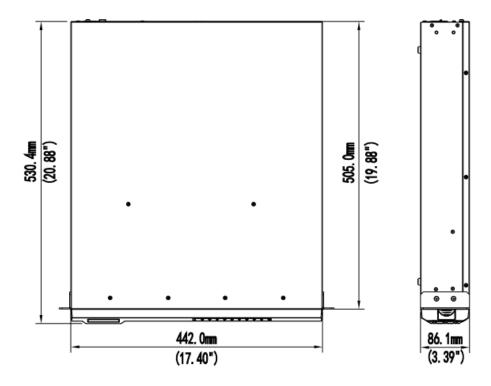

Rear Panel



No.	Item	Description
	Grounding terminal	Equipment grounding
	Power interface	AC power, 100 V-240 V AC
	Power switch	Turn on/off device when connected to power
	Mini-SAS interface	For connection to the host



"Your Reliable Integrated Video Surveillance Solutions Provider"

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131 Email: info@qixingtechnology.com; qixing@qixingtechnology.com https://www.qixingtechnology.com ©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.