

BDTSecureDEU1016 Disk Enclosure

Overview

BDTSecureDEU1016, with high performance, high reliability, high density, high scalability, is an affordable high-level disk enclosure developed especially for video surveillance.




Features

- High density
The innovative enclosure with 477.1 mm depth and 3U height that holds up to 16 disks, is space-saving and applicable to the standard rack-mounted scenarios.
- Power protection
Disk powered on sequentially during system startup, protection from impulse current.
- Multistage fan speed and energy saving
Fans with multistage speed are configured in the hot-swappable frame in redundancy mode. System power consumption can be balanced intelligently with heat dissipation calculation to ensure low power consumption and stable operation of the system.
- Redundant power supplies


Specifications

	BDTSecureDEU1016
Storage	
HDD	16 SATA Interfaces
Disk Capacity	up to 8TB for each disk
External Interface	
Back-end Expansion Interface	1 mini SAS
General	
Power Supply	100 ~ 240V
Consumption (with HDD)	≤ 100W
Working Environment	-10 °C~ 55 °C 5%~95% RH (non-condensing)
Weight(Without HDD)	< 10kg(22lb)
Dimensions (W×D×H)	481.6 × 477.1× 130.5mm (18.96" × 18.78" × 5.14")

Dimensions

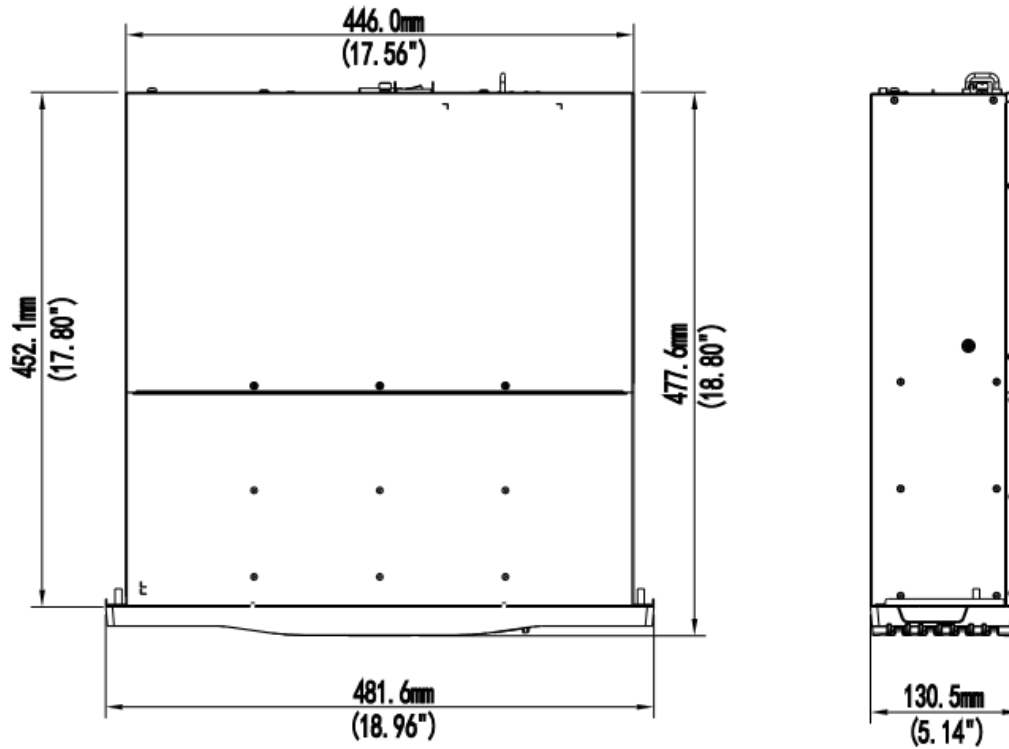

Rear Panel

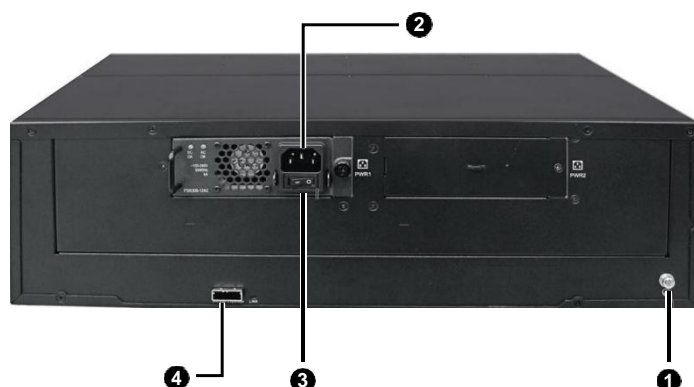

No.	Item	Description
	Grounding terminal	Equipment grounding
	Power interface	AC power, 100 V-240 V AC
	Power switch	Turn on/off device when connected to power
	Mini-SAS interface	For connection to the host



“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.