


# PWR-DC5611-P@NB 60W PSE



## Specifications

PSE	PWR-DC5611-P@NB
INPUT	AC 100-240V~ 50/60Hz 2AMax
OUTPUT	DC 56V/1.1A (+2%,-4%)
Protection/Environmental	
Protection	Output over current protection: 1.2A Short circuit protection (Yes)
	Surge protection power input port meets EN 61000-4-5 criterion B: L-N 2KV L,N-PE 4KV Output communication port :1kV differential mode (criterion B)
Enviromental	
Storage Temperature	-40°C~70°C(-40°F~158°F)
Operating Temperature	-20°C~60°C(-4°F~140°F)
Working humidity	<95% RH
Physical Properties	
Weight	473g(1.04lb)
Dimension(LxWxH)	183mmx70.8mmx37mm(7.20"x2.79"x1.46")
Installation mode	Plane installation
Color	Black
Input plug	3-pin plug
Power Out Pin	Endspan 1.2(+),3.6(-)Midspan 4.5(+),7.8(-)
Output plug	18.5±0.5mm (Network Cable Connector)
Safety Standards	
Certification	CCC,CB,CE,FCC,UL

## Dimensions

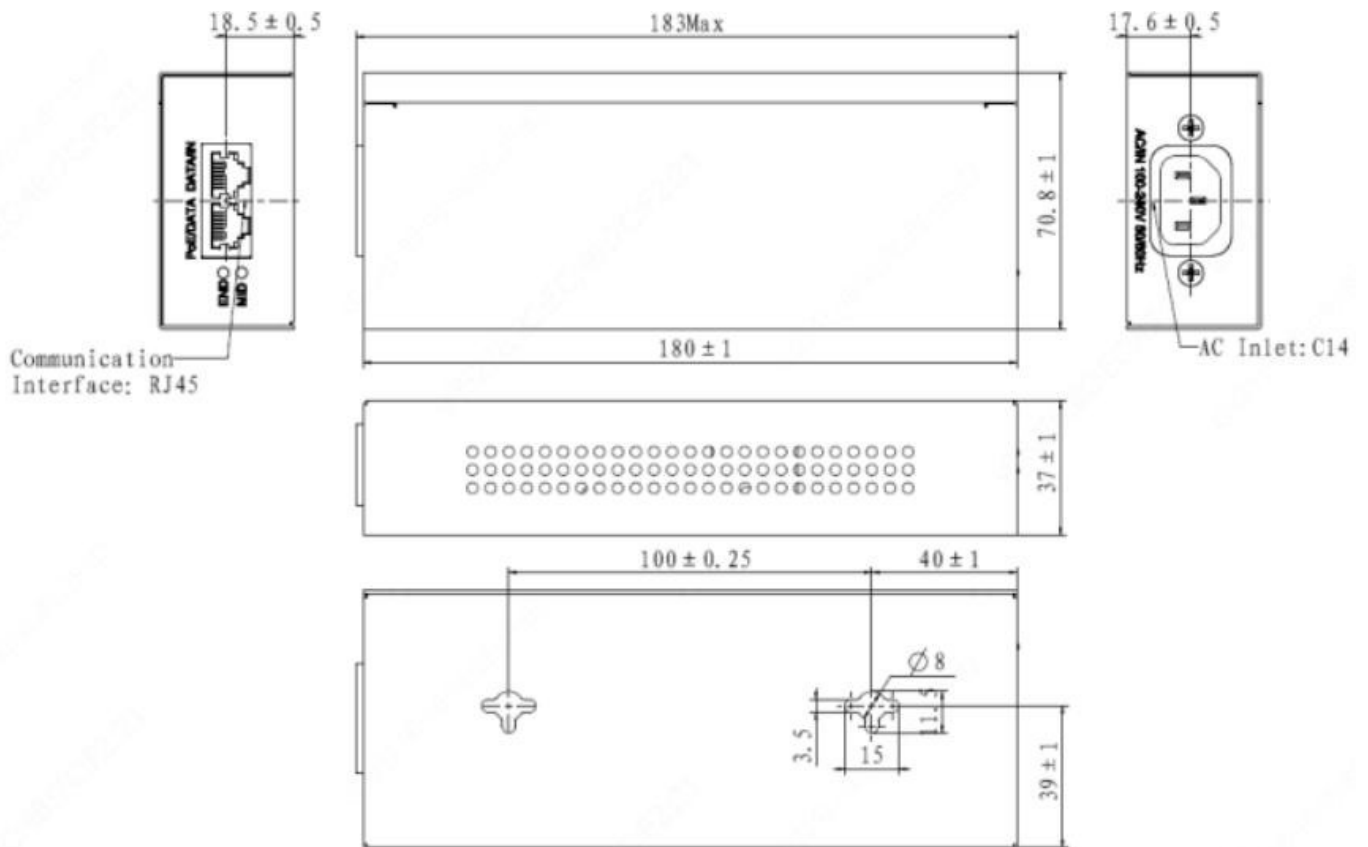

“Your Reliable Integrated Video Surveillance Solutions Provider”

### Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

https://www.qixingtechnology.com

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.