


UTP Category 5E Cables CCA

Content of Data Sheet		
Product model	CAB-LC2100B-CCA-IN-NB	
Product specification	HSYV-6 4×2×0.50	
Conductor	Material	CCA(Copper content:23%)
	AWG	24
	Nom.O.D.(mm)	0.5±0.01 mm
	DC resistance	<13.5Ω/100m
Insulation	Material	HDPE
	Thickness	0.2±0.02 mm
	Diameter	0.92±0.05 mm
	Color	Blue/White- Blue Orange/White-Orange
Pitch	Offset pitch	≤25 mm
	Cable pitch	≤140 mm
Sheath	Material	PVC
	External O.D.	5.1±0.3 mm
	Color	Gray
	Tensile strength	>13.5 Mpa
	Thickness	0.5±0.05 mm
Surface Printing	Letter height	3.0±0.3 mm
	Color	Black
	Print error & Space	1±0.005 m
	Case number	Yes
Packing	Packing	Carton

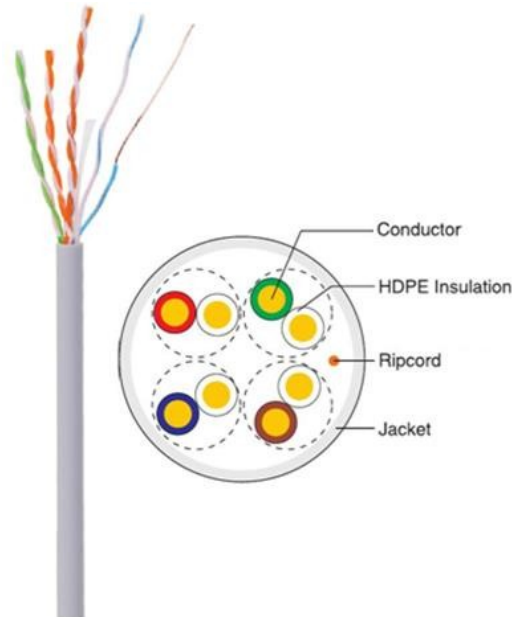

	Once packing dimension	350mm*216mm*350mm		
	Twice packing dimension	370mm*460mm*370mm		
	Twice packing quantity	2 cases		
Packing length	305±1m			
Rip-cord	Yes	Crossing backbone	Yes	
Ambient temperature	-20℃~60℃			

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.