


UTP Category 6 Cables CCA

Content of Data Sheet			
Product model	CAB-LC3100B-CCA-IN-NB		
Product specification	HSYV-6 4×2×0.585		
Conductor	Material	CCA(Copper content:27%)	
	AWG	23	
	Nom.O.D.(mm)	0.585±0.05 mm	
	DC resistance	<12Ω/100m	
Insulation	Material	HDPE	
	Thickness	0.2±0.02 mm	
	Diameter	1.05±0.05 mm	
	Color	Blue/White- Blue	Green/White-Green
		Orange/White-Orange	Brown/White-Brown
Pitch	Offset pitch	≤20 mm	
	Cable pitch	≤120 mm	
Sheath	Material	PVC	
	External O.D.	6.2±0.3 mm	
	Color	White	
	Tensile strength	>13.5 Mpa	
	Thickness	0.5±0.05 mm	
Surface Printing	Letter height	3.0±0.3 mm	
	Color	Black	
	Print error & Space	1±0.005 m	
	Case number	Yes	
Packing	Packing	Carton	

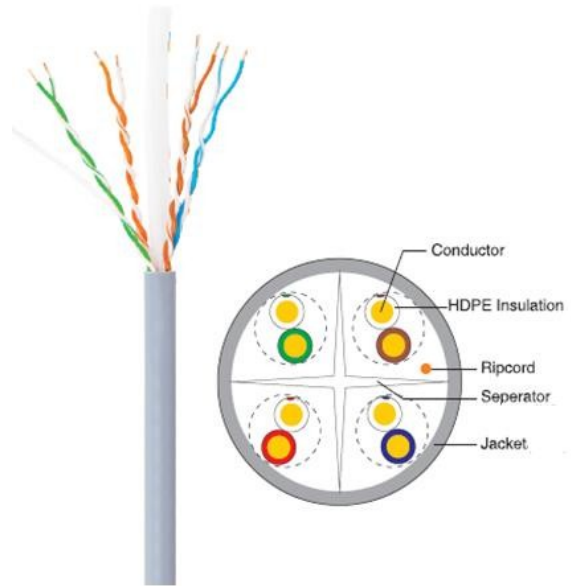

	Once packing dimension	420mm*205mm*420mm		
	Twice packing dimension	450mm*440mm*445mm		
	Twice packing quantity	2 cases		
Packing length	305±1m			
Rip-cord	Yes	Crossing backbone	Yes	
Ambient temperature	-20℃~60℃			

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.