


## UTP Category 5E Cables

Content of Data Sheet				
Product model	CAB-LC2100B-E-IN			
Product specification	HSYV-5e 4×2×0.45			
Test Standard	ISO/IEC11801、TIA-568-C.2、IEC61156-6			
Conductor	Material	OFC(Oxygen free copper)		
	AWG	25		
	Nom.O.D.(mm)	0.45±0.005 mm		
	DC resistance	≤115 Ω/km		
Insulation	Material	HDPE		
	Thickness	0.17±0.01 mm		
	Diameter	0.81±0.05 mm		
	Color	Blue/White- Blue	Green/White-Green	
		Orange /White-Orange	Brown/White-Brown	
Pitch	Offset pitch	≤25 mm		
	Cable pitch	≤140 mm		
Sheath	Material	PVC(complies RoHS/REACH)		
	External O.D.	4.7±0.3 mm		
	Color	Gray(RAL7046)		
	Tensile strength	>13.5 Mpa		
	Thickness	0.55±0.05 mm		
Surface Printing	Letter height	3.0±0.3 mm		
	Color	Black		
	Print error & Space	1±0.005 m		
	Case number	Yes		

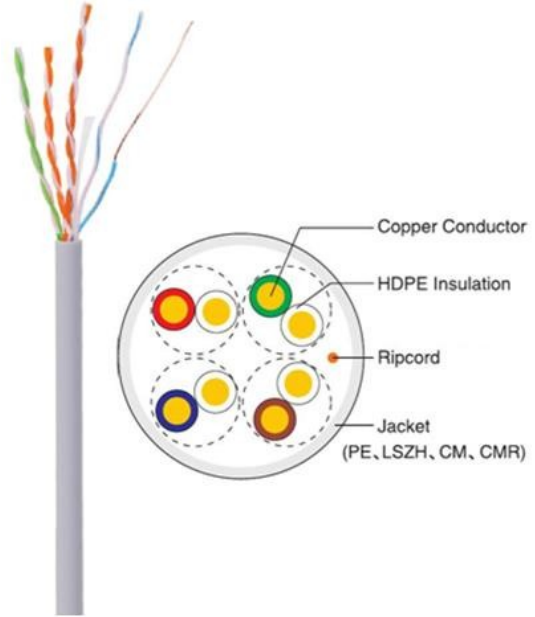

Packing	Packing	Carton
	Once packing dimension	340mm*220mm*340mm
	Twice packing dimension	360mm*470mm*360mm
	Twice packing quantity	2 cases
Packing length	305±1 m	
Rip-cord	Yes	
Ambient temperature	-20℃~60℃	

**“Your Reliable Integrated Video Surveillance Solutions Provider”**

**Shenzhen Starlink Technology Co.,Ltd**

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: [info@qixingtechnology.com](mailto:info@qixingtechnology.com); [qixing@qixingtechnology.com](mailto:qixing@qixingtechnology.com)

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.