


UTP Category 6 Cables

Content of Data Sheet				
Product model	CAB-LC3100			
Product specification	HSYV-6 4×2×0.57			
Test Standard	YD/T1019-2013			
Conductor	Material	OFC(Oxygen free copper)		
	AWG	23		
	Nom.O.D.(mm)	0.57±0.005 mm		
	DC resistance	≤95 Ω/km		
Insulation	Material	HDPE		
	Thickness	0.2±0.02 mm		
	Diameter	1.02±0.05 mm		
Color	Blue/White- Blue	Green/White-Green	Electrical Characteristics:	
	Orange /White-Orange	Brown/White-Brown		
Pitch	Offset pitch	≤20 mm		Frequency
	Cable pitch	≤120 mm		ohm
Sheath	Material	PVC(complies RoHS/REAC)		RL
	External O.D.	6.2±0.3 mm		ATT
	Color	Blue(RAL5015)		NEXT
	Tensile strength	>13.5 Mpa		impedance
	Thickness	0.6±0.05 mm		≥dB/100m
				≤dB/100m
Surface Printing	Letter height	3.0±0.3 mm		≥dB/100m
	Color	Black		1
	Print error & Space	1±0.005 m		4
	Case number	Yes		10
				16
Packing	Packing	Carton		20
				25
				31.25
				62.5
				100
				155
				200
				250

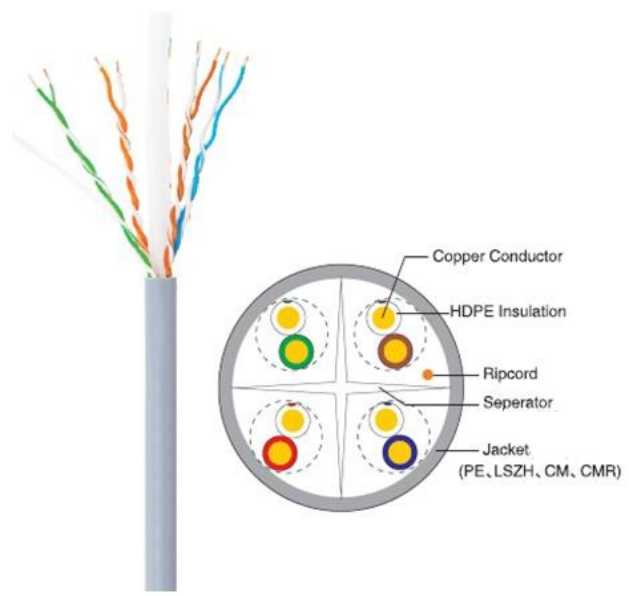

	Once packing dimension		420mm*205mm*420mm		Frequency	FEXT	PS NEXT	PS FEXT	Phase delay
	Twice packing dimension		450mm*440mm*445mm		MHz	≥dB/100m	≥dB/100m	≥dB/100m	≤ns/100m
	Twice packing quantity		2 cases		1	63.8	72.3	64.8	570.0
					4	51.7	63.3	57.7	552.0
Packing length	305±1m				10	43.8	57.3	44.8	545.4
					16	39.7	54.3	40.7	543.0
Rip-cord	Yes	Crossing backbone	Yes	20	37.7	52.8	38.7	542.0	
				31.25	33.9	49.9	34.9	540.4	
Ambient temperature	-20℃~60℃				62.5	27.8	45.4	28.8	538.6
					100	23.8	42.3	24.8	537.4
					150	20.2	39.4	20.9	536.0
					200	17.7	37.8	18.7	536.0
				250	15.8	36.3	16.8	536.0	

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.