


Bi-spectral Infrared Body Temperature Fast Screening Instrument

USS-TIC500

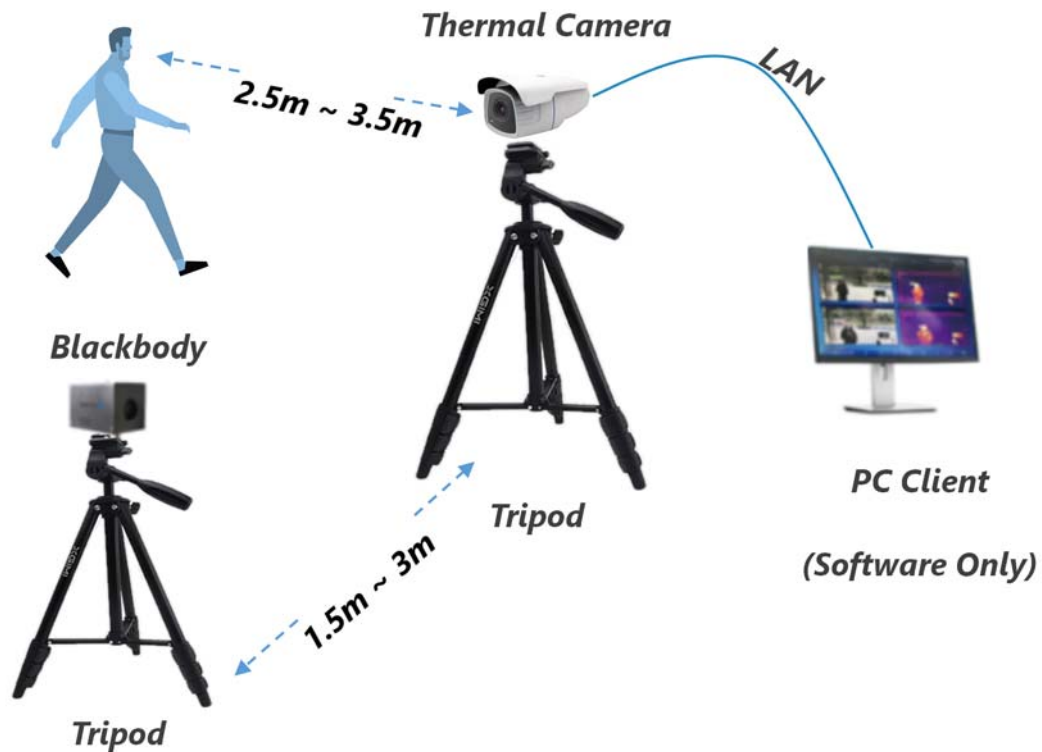

Introduction

The dual-view infrared USS-TIC-500 series dual-spectrum infrared body temperature rapid screening instrument is mainly developed based on the principle of infrared thermal radiation. It uses a non-refrigerated core and low signal-noise image processing technology. It is a non-contact, real-time, continuous and accurate Temperature measuring equipment. At the same time, a dedicated software system can be used to visually display the temperature information of the temperature measurement objects. It can be used for entry-exit health quarantine at customs, airports, stations, terminals, land ports, and epidemic prevention in key places such as schools, hospitals, office buildings Control scenes are widely used.

Key Features

Thermal imaging function:

Resolution 384 × 288, high sensitivity detector

Highest temperature cross cursor positioning

Supports point, line, rectangle, and irregular area temperature measurement modes

Support human body temperature abnormal alarm function

Support automatic capture of moving face targets

Support wearing a mask to identify the face area to avoid false alarms from non-face high temperature objects

Visible light phase function:

500W high-definition visible light detector

Supports automatic exposure control and automatic white balance

Supports face temperature measurement mode, intelligently analyzes face targets and measures body temperature, supports multiple alarm linkages

Dual light temperature measurement linkage, can draw regular and superimposed temperature measurement information on visible light image

Specifications

| Model | USS-TIC500 |
|---|--|
| <i>Thermal Camera</i> | |
| <i>Sensor type</i> | <i>Uncooled detector</i> |
| <i>Sensor pixels</i> | <i>384 × 288</i> |
| <i>Response band</i> | <i>7.5 ~ 14μm</i> |
| <i>Pixel pitch</i> | <i>17μm</i> |
| <i>Optical Transmission Calibration</i> | <i>Manual / Automatic</i> |
| <i>NETD (Noise Equivalent Temperature Difference)</i> | <i><50mk (@ 25 ° C, F # = 1.0)</i> |
| <i>Lens focal length</i> | <i>6.5mm</i> |
| <i>Field of View</i> | <i>50.8 ° × 37.1 °</i> |
| <i>Image frame rate</i> | <i>30Hz</i> |
| <i>Palette</i> | <i>Hot white, black hot, iron red, etc.</i> |
| <i>Image and Video</i> | |
| <i>Thermal Image / Video / Visible Light Picture</i> | <i>.jpg (including full temperature data) / Full Temperature Infrared Video / .jpg Visible Light Picture</i> |
| <i>Visible light camera parameters</i> | |
| <i>Focal length</i> | <i>2.7mm</i> |
| <i>Sensor pixels</i> | <i>5 million pixels</i> |

Temperature measurement function

| | |
|---|--|
| Temperature measurement range | 0 ° C-70 ° C |
| Temperature measurement deviation | ± 0.3 ° C (with black body) |
| Temperature measurement area setting | Support global highest temperature, lowest temperature, average temperature tracking, point, line, rectangle, irregular area temperature measurement mode |
| Over temperature alarm function | Support human body temperature abnormal alarm function, area alarm text, temperature measurement box color can be set, alarm voice prompt |
| Intelligent features | Support automatic capture of moving face targets |
| Face area recognition | Support wearing a mask to identify the face area to avoid false alarms from non-face high temperature objects |


General specifications

| | |
|---|---------------------------------------|
| Power input | DC12V |
| Power | 20W (MAX) |
| Size (mm) | 232mmx112mm × 95mm |
| Weight | ≤2.5Kg |
| Protection class | IP66 |
| Working temperature and humidity | -20 ° C ~ + 55 ° C, <90% RH |

Other

| | |
|-----------------------|--|
| Item List | 1*Bullet thermal camera, 1*Black body , 2*Tripod, Client Software |
| PC requirement | Windows 10 64 bit, I5, 8GB RAM, NVIDIA Discrete graphics 2G |

Dimensions

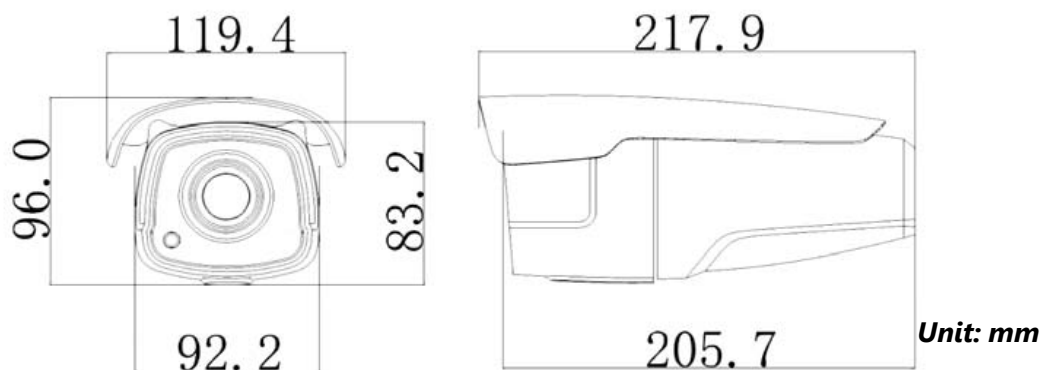

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.