

## ***2MP 22x Lighthunter Network PTZ Dome Camera***

### ***BDTSecure6322LRSRX22(P)-D***



## ***Key Features***

### ***Optics***

- ***Starlight illumination***
- ***22x optical zoom***
- ***Accurate and fast focusing***
- ***Smart IR, up to 150m (492ft) IR distance***

### ***Compression***

- ***2 Megapixel image***
- ***Ultra 265, H.265, H.264, MJPEG***
- ***Triple streams***
- ***Customized OSD***

### ***Network***

- ***ONVIF Conformance***

## Structure

- Innovative snow-removing functionality
- Intelligent temperature control technology
- 6KV surge protection designed for network interface
- IP66

## Specifications


	BDTSecure6322SRX22PD		BDTSecure6322LRX22D		
<b>Camera</b>					
Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS				
Lens	5.2 ~ 114.4mm, AF automatic focusing and motorized zoom lens				
Digital Zoom	16				
Optical Zoom	22				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	5.2	80.7(264.7ft)	32.3(105.9ft)	16.1(52.9ft)	8.1(26.5ft)
	114.4	1775.2(5824.1ft)	710.1(2329.6ft)	355.0(1164.8ft)	177.5(582.4ft)
Angle of View (H)	53.4° ~ 2.7°				
Angle of View (V)	32.3° ~ 1.5°				
Angle of View (O)	60.3° ~ 3.1°				
Shutter	Auto/Manual; shutter time: 1 ~ 1/100000s				
Minimum Illumination	Colour: 0.003 lux (F1.5,AGC ON) 0 lux with IR				
Iris	Auto/Manual; F1.5 ~ F3.8				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>52dB				
IR Range	UP to 150m (492ft)				
Defog	Digital Defog				
WDR	120dB				
<b>Video</b>					
Video Compression	Ultra 265, H.265, H.264, MJPEG				
H.264 code profile	Baseline profile, Main Profile, High Profile				
Frame Rate	Main Stream: 2MP (1920*1080), Max 60fps; Sub Stream: 2MP (1920*1080), Max 60fps; Third Stream: D1 (720*576), Max 60fps				
HLC	Supported				
BLC	Supported				
DIS	Supported				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 24 areas				

<b>ROI</b>	<i>Up to 8 areas</i>	
<b>Motion Detection</b>	<i>Up to 4 areas</i>	
<b>Smart</b>		
<b>General Function</b>	<i>Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication</i>	<i>Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication</i>
<b>Audio</b>		
<b>Audio Compression</b>	<i>G.711</i>	<i>N/A</i>
<b>Two-way audio</b>	<i>Supported</i>	<i>N/A</i>
<b>Suppression</b>	<i>Supported</i>	<i>N/A</i>
<b>Sampling Rate</b>	<i>8KHZ</i>	<i>N/A</i>
<b>Storage</b>		
<b>Edge Storage</b>	<i>Micro SD, up to 256GB</i>	
<b>Network Storage</b>	<i>ANR</i>	
<b>Network</b>		
<b>Protocols</b>	<i>IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS</i>	
<b>Compatible Integration</b>	<i>ONVIF (Profile S, Profile G, Profile T), API</i>	
<b>Pan &amp; Tilt</b>		
<b>Pan Range</b>	<i>360° (endless)</i>	
<b>Pan Speed</b>	<i>0.1°/s ~ 240°/s</i>	
	<i>Preset speed:300°/s</i>	
<b>Tilt Range</b>	<i>-15° ~ 90° (auto reverse)</i>	
<b>Tilt Speed</b>	<i>0.1° ~ 80°/s</i>	
	<i>Preset speed: 80°/s</i>	
<b>Number of Presets</b>	<i>1024</i>	
<b>Patrol</b>	<i>Preset patrol, route patrol, recorded patrol</i>	
<b>Home Position</b>	<i>Supported</i>	
<b>Interface</b>		
<b>Audio I/O</b>	<i>Audio cable</i>	<i>N/A</i>
	<i>1 Input: impedance 35kΩ; amplitude 2V [p-p]</i>	<i>N/A</i>
	<i>1 Output: impedance 600Ω; amplitude 2V [p-p]</i>	<i>N/A</i>
<b>Alarm I/O</b>	<i>1/1</i>	<i>N/A</i>
<b>Serial Port</b>	<i>N/A</i>	<i>N/A</i>
<b>Network</b>	<i>1 RJ45 10M/100M Base-TX Ethernet</i>	
<b>Video Output</b>	<i>N/A</i>	<i>N/A</i>
<b>General</b>		
<b>Power</b>	<i>DC 12V±10%, PoE (PSE required)</i>	<i>DC 12V±10%</i>
	<i>Power consumption: 4~27.6W</i>	<i>Power consumption: 4~23.5W</i>
<b>Dimensions (Ø x H)</b>	<i>Ø 220 x 369mm (Ø8.7" x 14.5")</i>	
<b>Weight</b>	<i>3.4kg (7.5lb)</i>	<i>3.3kg (7.3lb)</i>
<b>Working Environment</b>	<i>-40°C ~ 65°C (-40°F ~ 149°F), Humidity: ≤95% RH (non-condensing)</i>	
<b>Ingress Resistant</b>	<i>IP66</i>	

Reset Button

Supported

## Dimensions

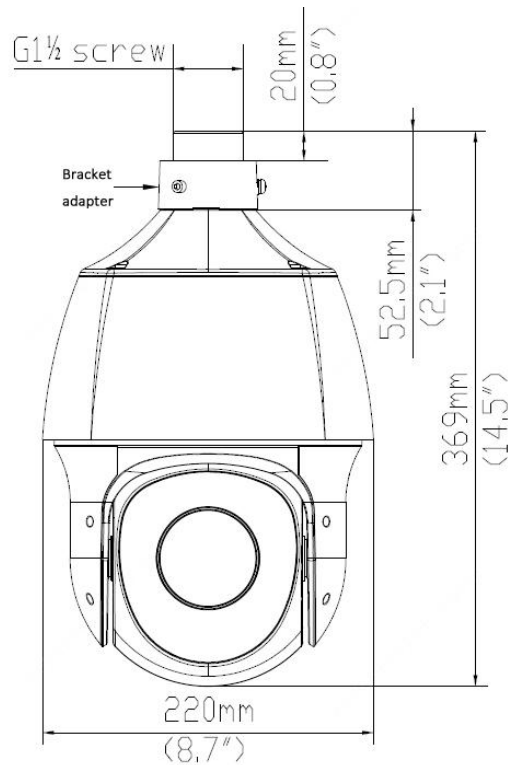

**“Your Reliable Integrated Video Surveillance Solutions Provider”**

### Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: [info@qixingtechnology.com](mailto:info@qixingtechnology.com); [qixing@qixingtechnology.com](mailto:qixing@qixingtechnology.com)

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.