

2MP 33x Indoor Network PTZ Dome Camera

BDTSecure6222EIX33UP



Key Features

Optics

- ***Starlight illumination***
- ***33x optical zoom***
- ***Accurate and fast focusing***

Compression

- ***Ultra 265, H.265, H.264, MJPEG***
- ***Triple streams***
- ***Customized OSD***

Network

- ***ONVIF Conformance***

Structure


- **Fast installation structure design**
- **6KV surge protection designed for network interface**
- **IK10**

Specifications

BDTSecure6222EIX33UP					
Camera					
Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS				
Lens	4.5 ~ 148.5mm, AF automatic focusing and motorized zoom lens				
Digital Zoom	16				
Optical Zoom	33				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	4.5	69.8(229ft)	27.9(91.5ft)	14(45.9ft)	7(23ft)
	148.5	2304.3(7560ft)	921.7(3024ft)	460.9(1512.1ft)	230.4(756ft)
Angle of View (H)	62.67° ~ 2.82°				
Angle of View (V)	38.4° ~ 1.3°				
Angle of View (O)	77.1° ~ 3.3°				
Shutter	Auto/Manual; shutter time: 1 ~ 1/100000s				
Minimum Illumination	Colour: 0.001Lux (F1.5, AGC ON) B/W: 0.0001Lux(F1.5, AGC ON)				
Iris	Auto/Manual; F1.5 ~ F4.0				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>52dB				
Defog	Digital Defog				
WDR	120dB				
Video					
Video Compression	Ultra 265, H.265, H.264, MJPEG				
H.264 code profile	Baseline profile, Main Profile, High Profile				
Frame Rate	Main Stream: 2MP (1920*1080), Max 60fps; Sub Stream: 2MP (1920*1080), Max 60fps; Third Stream: D1 (720*576), Max 60fps				
HLC	Supported				
BLC	Supported				
EIS	Supported				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 24 areas				

ROI	<i>Up to 8 areas</i>
Motion Detection	<i>Up to 4 areas</i>
Smart	
General Function	<i>Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication</i>
Audio	
Audio Compression	<i>G.711</i>
Two-way audio	<i>Supported</i>
Suppression	<i>Supported</i>
Sampling Rate	<i>8KHZ</i>
Storage	
Edge Storage	<i>Micro SD, up to 256GB</i>
Network Storage	<i>ANR</i>
Network	
Protocols	<i>IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS</i>
Compatible Integration	<i>ONVIF (Profile S, Profile G, Profile T), API</i>
Pan & Tilt	
Pan Range	<i>360° (endless)</i>
Pan Speed	<i>0.1°/s ~ 400°/s Preset speed:400°/s</i>
Tilt Range	<i>1° ~ 90° (auto reverse)</i>
Tilt Speed	<i>0.1° ~ 240°/s Preset speed: 240°/s</i>
Number of Presets	<i>1024</i>
Patrol	<i>Preset patrol, route patrol, recorded patrol</i>
Home Position	<i>Supported</i>
Interface	
Audio I/O	<i>Audio cable 1 Input: impedance 35kΩ; amplitude 2V [p-p] 1 Output: impedance 600Ω; amplitude 2V [p-p]</i>
Alarm I/O	<i>2/1</i>
Serial Port	<i>1 RS485</i>
Network	<i>1 RJ45 10M/100M Base-TX Ethernet</i>
Video Output	<i>1 BNC, impedance 75Ω; amplitude 1V [p-p]</i>
General	
Power	<i>AC 24V±25%, DC 24V±25%, PoE (IEEE 802.3at) Power consumption: 8.5~15.5W</i>
Dimensions (Ø x H)	<i>Ø 195 x 263mm (Ø 7.7" x 10.4")</i>
Weight	<i>2.9kg (6.4lb)</i>
Working Environment	<i>-20°C ~ 50°C (-4°F ~ 122°F), Humidity: ≤95% RH (non-condensing)</i>
Vandal Resistant	<i>IK10</i>

Dimensions

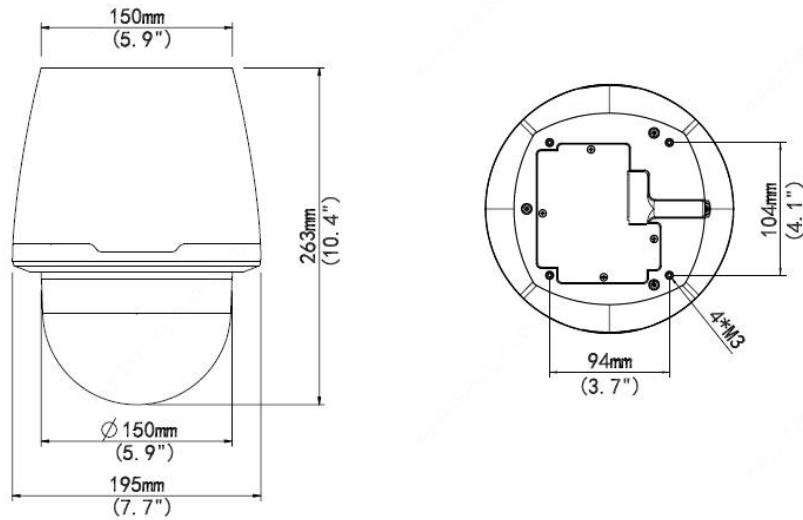

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.