

Indoor LED Display Module

BDTSecureMW7225-M




Key Features

- **Broadcast grey processing gives more image details**
- **Superior brightness and color uniformity maintains smooth and complete image quality**
- **Bezel-free native 1080P, 4K and customized resolution LED video wall system**
- **High brightness provides vivid images in a range of lighting conditions**
- **Superior contrast ratio**
- **Ultra high refresh rate**
- **Wide view of field:160°(H)/ 140°(V)**
- **Low heating and natural heat dissipation mechanism enables fan-less design, no noise**
- **Support 7*24 working and lower power consumption**
- **Long service life**

Specifications

Model	BDTSecureMW7225-M
LED Module	
Pixel Pitch	P2.5
Resolution(W×H)	128×64
Dimensions(mm)	320(W)×160(H)×12(D)
Pixel Density(dots/m²)	160000
Surface Evenness(mm)	≤0.2
Module Weight(kg)	0.4
Optical	
Single Pixel Brightness Correction	Support
Single Pixel Color Correction	Support
Brightness(nits)	800
Color Temperature(K)	3000 to 9000 adjustable
Viewing Angle	Horizontal 160°, Vertical 140°
Center distance deviation of LED	<3%
Brightness Uniformity	≥97%
Color Uniformity	±0.003Cx,Cy
Contrast	4000:1
Processing Performance	
Grey Level	14bit
Driving Mode (S)	Constant current driving, 1/32 scan
Frame Frequency(Hz)	50/60
Refresh Rate(Hz)	3840
Electrical	
Power Supply(V)	AC 200-240
Average Consumption(W/m²)	133
Max Consumption(W/m²)	400
General	
Maintenance Mode	Front/Rear
Ingress Protection	IP30
Operation Temperature/Humidity (°C/RH)	-10~+40°C/10~80%RH(No Condensation)
Storage Temperature/Humidity(°C/RH)	-20~+60°C/10~85%(No Condensation)
Working Hours(H)	50000

Dimensions

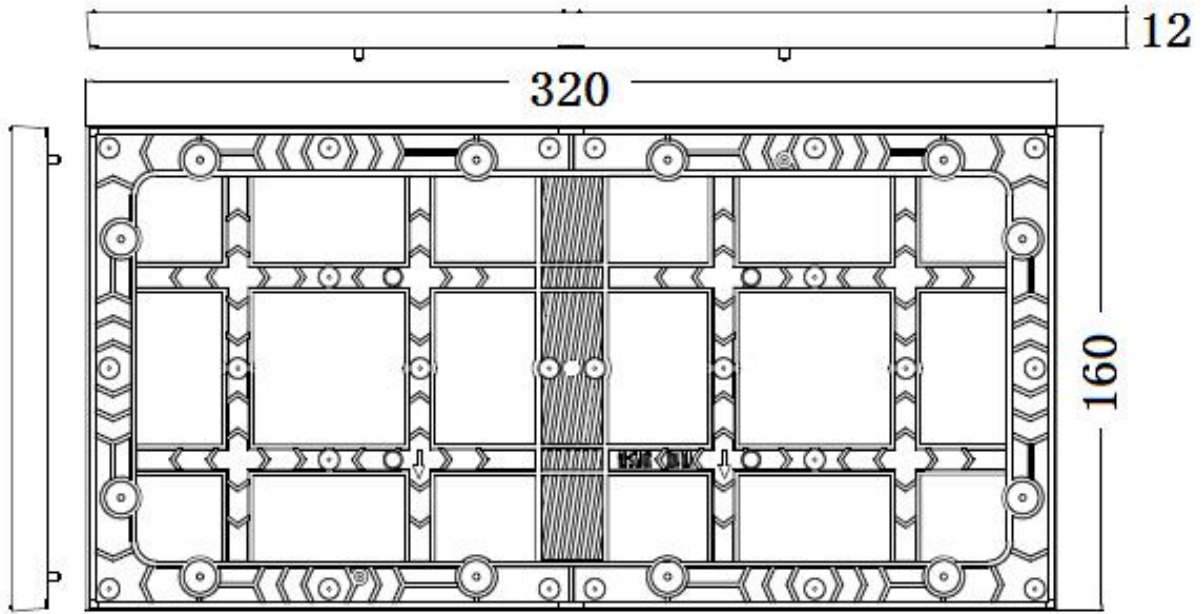

"Reliable Integrated Video Surveillance Solutions Provider"

Shenzhen Starlink Technology Co.,Ltd

No.1079, Minzhi Street, Longhua District, Shenzhen, China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*** Product specifications and availability are subject to change without notice.**