


BDTSecureHB7199CA USB HD Camera



Dimensions

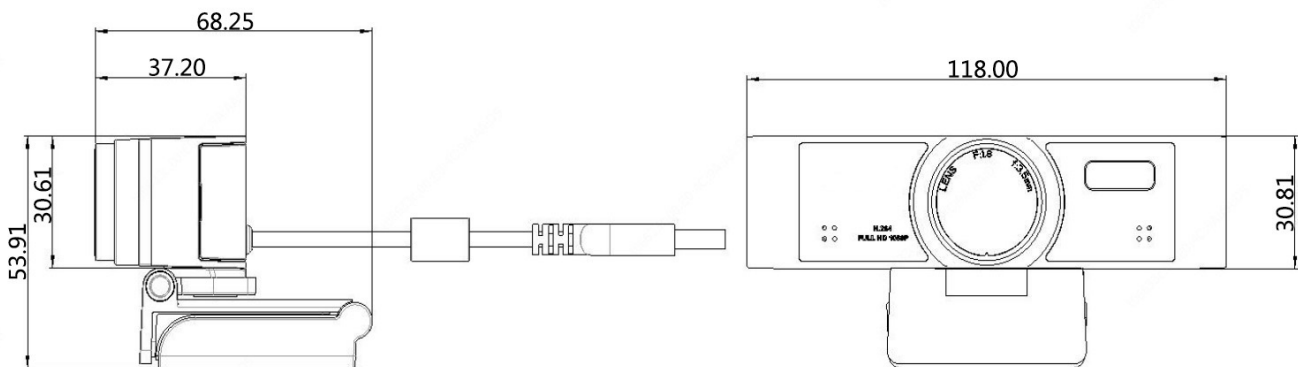

LENGTH:mm

Specifications

Model	BDTSecureHB7199CA
Image sensor	High quality CMOS sensor
Effective pixels	2 megapixel
Video format	1920x1080@30fps/1920x1080@25fps/1280x720@30fps/1280x720@25fps/ 960x540@30fps/960x540@25fps/640x360@30fps/640x360@25fps

Camera angle	Horizontal field angle:83°
Focal length	3.2mm
Minimum illumination	0.5Lux(F2.0, AGC ON)
Focus mode	Manual
Aperture	Fixed
Electronic shutter	1/30s~1/10000s
White balance	Automatic, manual, specified color temperature
Digital noise reduction	2D/3D
Backlight compensation	Support
Pickup distance	6m
Pickup directivity	Omnidirectional
Interface type	USB 2.0
Working voltage	5V (USB powered)
Power	1W
Dimension	118mm(L)×37.2mm(W)×30.8mm(H)
Storage temperature	-40℃~+60℃
Working temperature	0℃~+40℃

Order Information

Model	Remake
BDTSecureHB7199CA	USB Camera

"Reliable Integrated Video Surveillance Solutions Provider"

Shenzhen Starlink Technology Co.,Ltd

No.1079, Minzhi Street, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

https://www.qixingtechnology.com

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

***Product specifications and availability are subject to change without notice.**