

Smart Interactive Display

BDTSecureMW3586T



Key Features

- **86" ultra-HD display**
- **Metal housing, 4mm AG anti-glare tempered glass, and ultra-thin and ultra-narrow appearance**
- **IR (Infrared Ray) touch technology, supports 20 points writing.**
- **Writing height below 2mm to bring smoother writing experience**
- **All-channel annotating, built-in Android writing software**
- **Smart sidebar menu**
- **Wireless screen sharing, convenient to presentation**
- **Built-in Android system and optional with Pluggable PC Module**
- **Double LAN bridging, supporting Android, Pluggable PC Module (Windows system) and external PC realize network bridging**
- **Public USB port auto switch**
- **Antenna hidden inside**
- **All channel can be loop-outed by HDMI**



Specifications

Model	BDTSecureMW3586T
Display	
Screen Size	85.6 inches
Backlight	D-LED
Pixel Pitch	0.4935mm×0.4935mm
Resolution	3840×2160
Brightness	400 cd/m²
Contrast	1200:1
Response Time	8 ms
Color	1.07B
Viewing Angle	Horizontal 178°, Vertical 178°
View Area	1895.04 (W) x 1065.96 (H)
Android System	
CPU Architecture	ARM A73+A53
CPU Working Frequency	1.5GHz
CPU Core	Quad Core
RAM	3GB DDR4
ROM	16GB
OS	Android 8.0
Touch	
Sensing Type	Infrared Touch Frame
Touch Accuracy	± 1mm
Surface Protection	4mm Toughened Glass
Response Time	≤ 10ms
Theory Clicks	Unlimited
Minimum Touch Object	≥ 2mm
Interface	
Input Interface	HDMI × 3, DP × 1, VGA × 1, LAN × 2, PC-AUDIO IN × 1, YPBPR × 1, AV × 1, TOUCH-USB × 2, OPS × 1, Android USB × 2, Public USB × 2,
Output Interface	HDMI × 1, AV × 1, S/PDIF × 1, AUDID OUT × 1
Control Interface	RS232-IN × 1




Speaker	
Speaker	2×15W
OSD	
Multi- Language	22 (English, Turkish, Danish, Norwegian-Bokmol, Romanian, Greek, Arabic, France, Spanish, Portuguese, German, Italian, Dutch, Swedish, Finnish, Polish, Czech, Russia, Korea, Simplified Chinese, Traditional Chinese, Japanese)
VESA	
VESA	4-M8 Screw Hole 600mm×400mm
General	
Power Supply	100 to 240 V AC
Consumption	≤500 W(on without OPS) <0.5 W(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	20%~80% (No Condensation)
Storage Temperature	-10~60°C
Storage Humidity	10%~80%(No Condensation)
Product Size (mm)	1989.18 (W) × 1080.22 (H) × 119.7 (D)
Packing Size (mm)	2140 (W) × 1340 (H) × 280 (D)
Weight	Net Weight:77Kg Gross Weight:99.5Kg
Accessory	
Standard	Remote Control×1, Power Cable×1, HDMI Cable×1, USB A-B Cable×1, Touch Pen×2, Qualified Certificate Lable×1, User Manual×1, Quick Guide×1, Warranty Card×1, Wall Mount×1, USB WiFi Adapter×1

Appearance

Dimensions

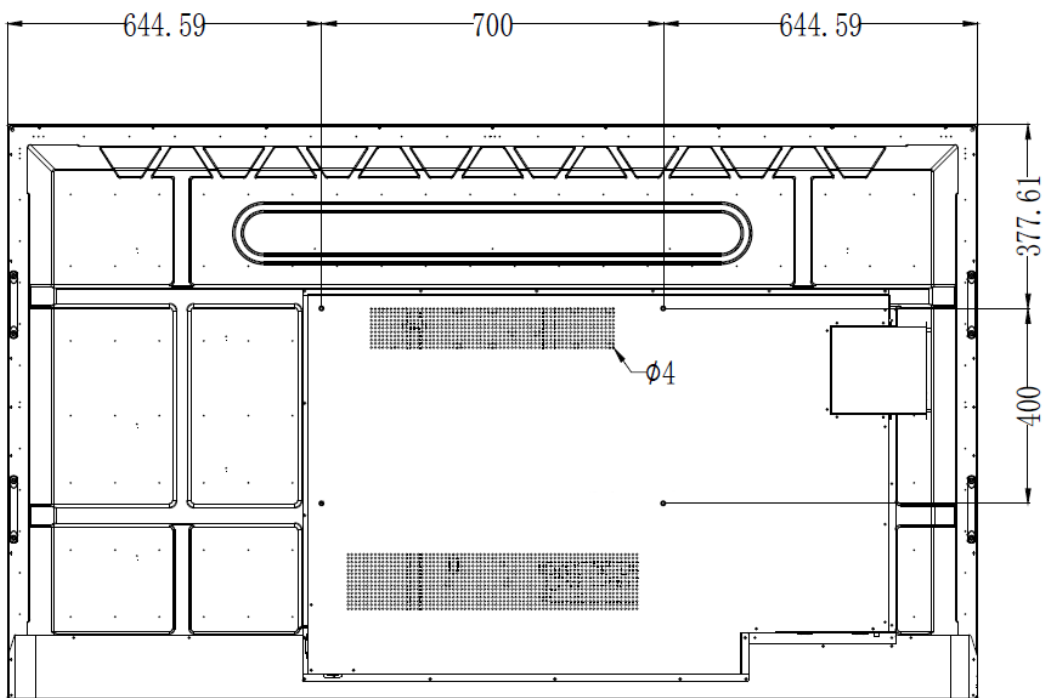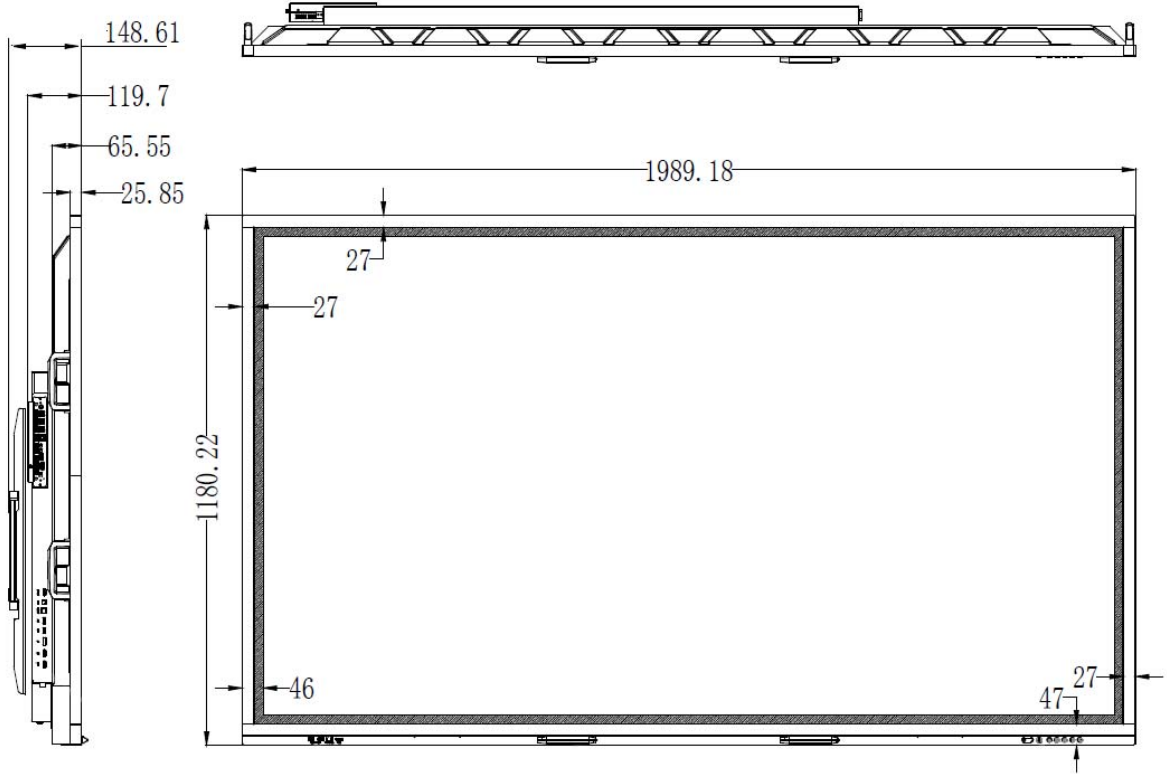

Interfaces

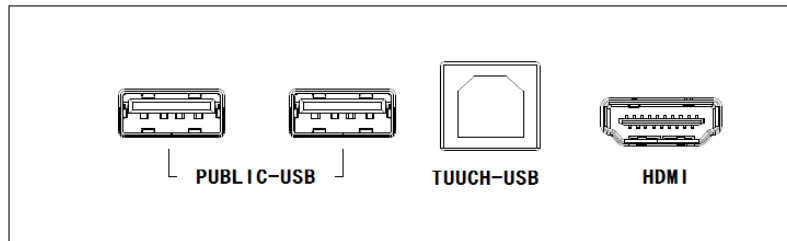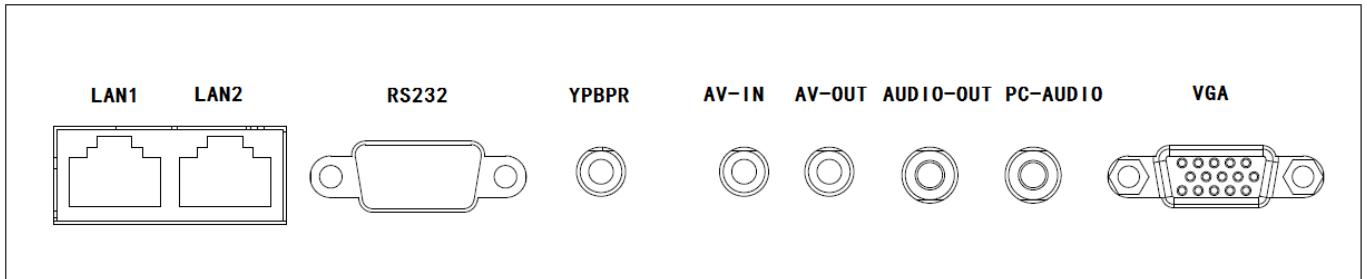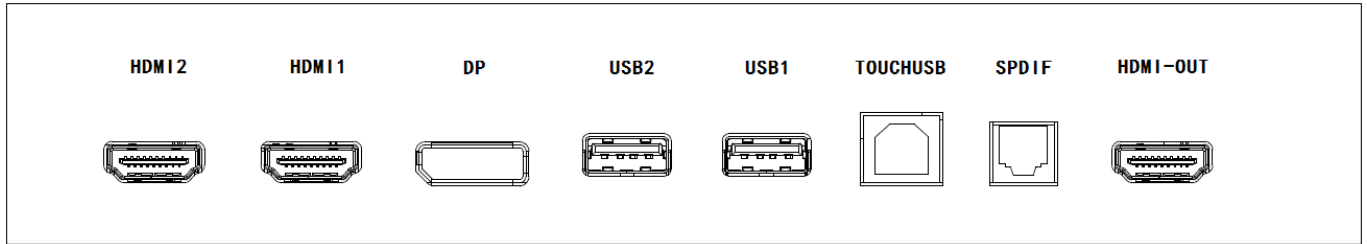

Order Information

<i>Model</i>	<i>Remake</i>
BDTSecureMW3586T	Smart Interactive Display
Mobile Stand	optional
External Pluggable PC Module (I7 Intel Core™ processors; not active)	optional
External Pluggable PC Module (I5 Intel Core™ processors; not active)	Optional
USB Camera	Optional

“Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

No.1079, Minzhi Street, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

****Product specifications and availability are subject to change without notice.***